


To connect the control system to the pe900 system via PROFIBUS. This coupling module converts the data to the devices connected to the pe900 system.



Type:	PROFIBUS-DP slave
PB baud rate:	9600Baud – 12MBaud
PB addressing:	2 – 99 via decimal coding switch
Interface:	Internal bus system on cross connector from device to device (C-bus) (at the last module is a bus terminator for the internal bus system required)
Supply voltage:	24V DC +/- 10 %
Current input:	100mA
Ambient temperature:	0°C – max. 40°C
LEDs:	1 LED to display "data send" at the internal bus 1 LED to display "data receive" at the internal bus 1 LED to display errors 1 LED to display RB communication with application at master active
Installation:	Norm mounting rail EN60715
Installation position:	Vertical (see picture)
Protection grade:	IP20
Casing:	Plastic
Cooling:	Convection
Dimensions (W x H x D):	22,5 x 100 x 115mm
Weight:	150g

### Application example:

Power pack, PROFIBUS coupling module with three A/D interfaces to control analog power supplies

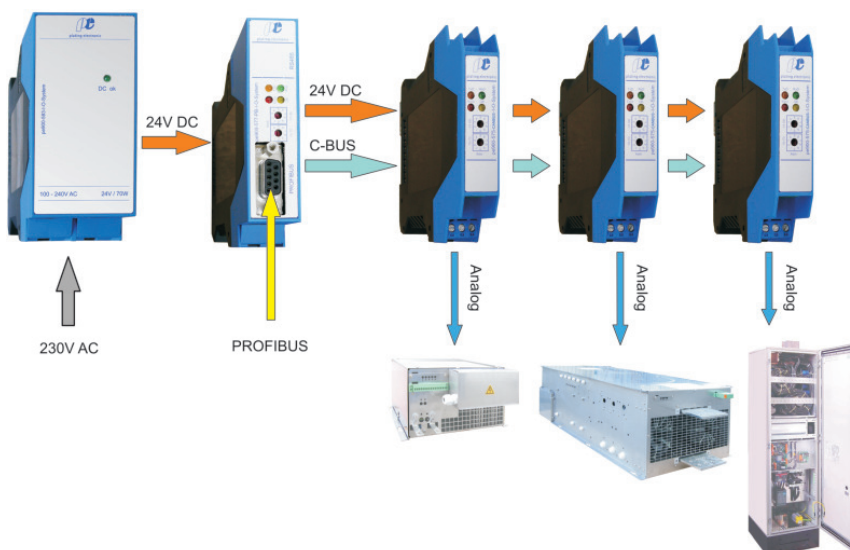

Technical equipment, design and features: subject to change! For further information please contact plating electronic GmbH.